


AUTOLOCK

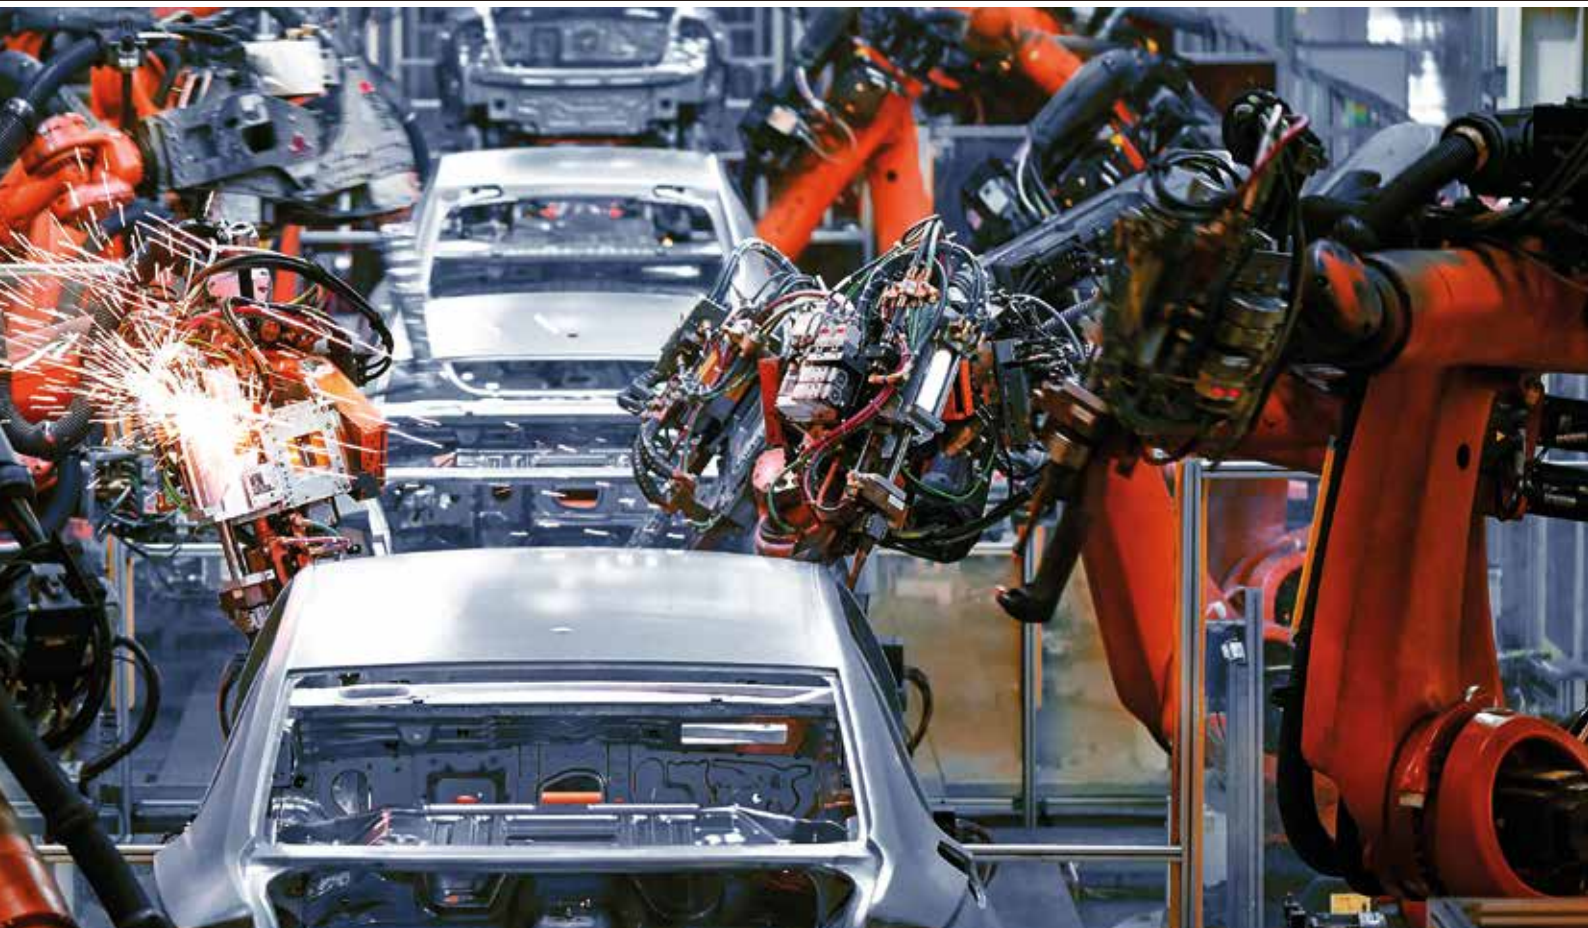

// EASY ASSEMBLY, MULTIPLE COLOURS, OPTIMUM PERFORMANCE

MAIN FEATURES

- ▲ SMOOTH COVER
- ▲ ELECTRICAL RESISTANCE SUPERIOR TO 1 MΩ
- ▲ FLAME RESISTANCE
- ▲ COMPATIBLE WITH PUSH-ON FITTINGS



// AUTOLOCK



Non conductive

Tube: oil resistant synthetic rubber.

Reinforcement: one high textile braid.

Colours: red, blue, yellow, green and black (conductive).

Cover: abrasion, ozone and hydrocarbon resistant synthetic rubber.

MSHA APPROVED

Application: high pressure hydraulic lines, fuel oil, antifreeze solutions, air and water. Compatible with PUSH ON fittings.

Constant operation: -40 °C +100 °C (-40 °F +212 °F)

air max T = +70 °C (+160 °F)

Safety factor: 1:4

Length: random

Item code	↔			↔		↻		↻		↻		⚖	
	Dash	mm	in	mm	in	Mpa	psi	Mpa	psi	mm	in	kg/m	lb/ft
8K7AH06	04	6,0	1/4"	12,70	0,50	2,8	400	11,2	1620	64,0	2,52	0,110	0,08
8K7AH10	06	10,0	3/8"	15,90	0,63	2,8	400	11,2	1620	76,0	2,99	0,160	0,11
8K7AH12	08	13,0	1/2"	19,80	0,78	2,8	400	11,2	1620	102,0	4,02	0,220	0,15
8K7AH16	10	16,0	5/8"	23,00	0,91	2,4	350	9,6	1400	107,0	4,21	0,270	0,19
8K7AH19	12	19,0	3/4"	26,90	1,06	2,1	300	8,4	1200	152,0	5,98	0,330	0,23
8K7AH25	16	25,0	1"	33,50	1,32	1,7	250	7,0	1000	203,0	7,99	0,500	0,34

MAIN APPLICATIONS

- // MACHINE TOOLS
- // PAPER INDUSTRY
- // INJECTION MOULDING MACHINE
- // TRANSFER LINES
- // PET BLOW FORMING MACHINES
- // ROBOT AND AUTOMATION

